



stratasys



MATERIAL DATA SHEET
P3™ DLP

P3™ Silicone 25A


by Shin-Etsu

P3™ Silicone 25A is a pure silicone material with the lasting mechanical and chemical properties and stability that silicones are known for.

P3™ Silicone 25A is a soft, flexible, and durable elastomer that features unique properties versus traditional polymers thanks to its distinct silicon-oxygen backbone. The material, an Origin exclusive by Shin-Etsu, is designed for applications requiring excellent tear resistance, elongation, chemical resistance, and consistent mechanical performance. With a Shore A hardness of 25, this material offers a balance of softness and strength, making it ideal for directly 3D printing seals, gaskets, selected applications in wearables and consumer goods. Tests prove the high resilience and stability over time across a wide temperature range, ensuring reliable performance in industrial, automotive, aerospace, and consumer applications. P3 Silicone 25A requires proper handling and post-processing to achieve optimal properties and surface finish.

Key Features

- Soft material with high tear resistance
- Excellent strength and rebound
- Superior thermal stability, also after 1,000 hours at 150 °C
- Cytotoxicity certification
- Flame retardant - UL-94 V0 certified
- Results in fine features with excellent surface finish
- Single-component UV resin; no mixing required
- Low curing shrinkage (<1%)
- Odorless

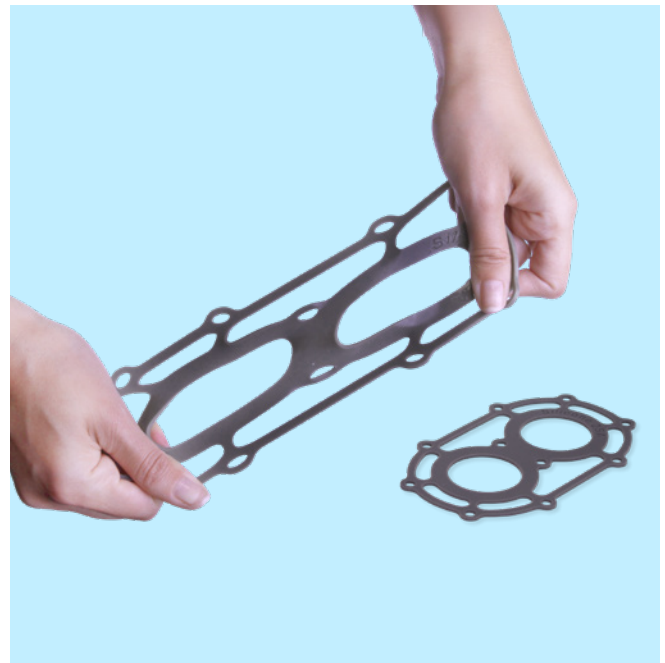

Industries & Applications

- Aerospace
- Automotive - Flexible seals and housings
- Industrial - Air and dust gaskets, cushioning pads
- Consumer electronics & goods



Liquid Properties

Property	Value
Appearance	Glossy Gray
Viscosity (23 °C)	17,000 mPa-s
Density	1.3 g/cm ³

Mechanical Properties

Property	Unit	Method	Post Processed
Tensile Stress at Break	MPa	ASTM D638	5.8 ± 2
Young's Modulus	MPa	ASTM D638	1.45 ± 0.07 ¹
Elongation at Break	%	ASTM D638	672 ± 18 ¹
Tear Strength	kN/m	ASTM D624	16 ± 3 ¹
Shore Hardness	A	ASTM D2240	20-25
Bayshore rebound resilience		ASTM D2632	50 ± 1
Compression set	%	ASTM D 395-03 (B) 23 °C for 22 hours	6

* Postprocessed according to the P3 Silicone 25A Material Processing Guide.

Other Properties


Property	Method	Post Processed
Thermal Conductivity	ISO 22007-2	0.28 W/m-K
Dielectric Constant	ASTM D150	4.43 x 10 ⁻¹¹ F/m
Volume Resistance	JIS K6911	3.84 x 10 ¹⁴ Ω-cm

Chemical Properties


Property	Unit	Method	Value
Flammability, Vertical	V Rating	UL94V 3 mm & 6 mm	V-0
Solid Density (Cured)	g/cm ³	ASTM D792	1.3
Water Absorption (24 hr)	%	ASTM D570	1.5%
Cytotoxicity		ISO 10993-5	Passed*

* According to the supplier's procedure

P3 Silicone 25A, 100% extension,
100 mm/min, 2 cycles

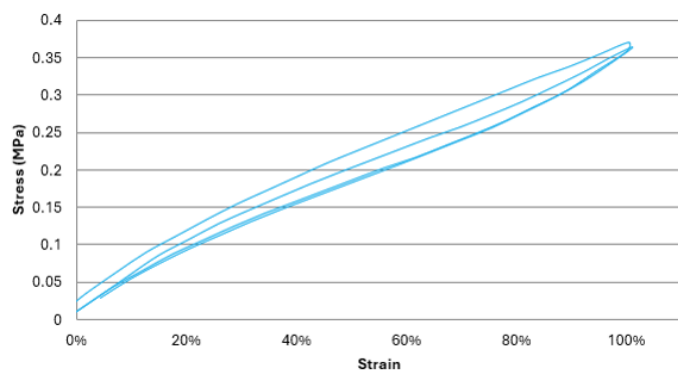


P3 Silicone 25A, 100% extension,
100 mm/min, 50 cycles

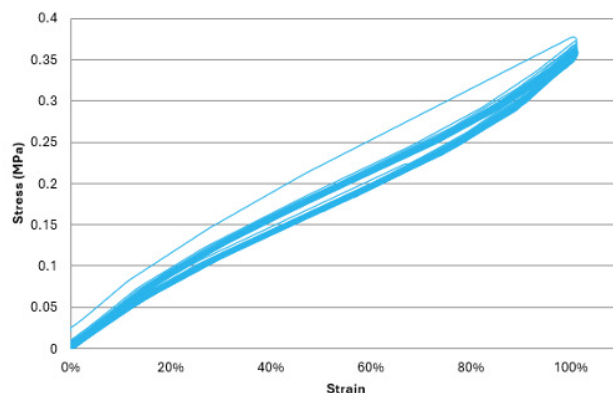




Feature Capabilities

Evaluated Feature	mm
Largest overhang no droop	3
Largest bridge no droop	7
Largest overhang no delamination	4.5
Largest bridge no delamination	13
Shallowest overhang no droop (deg)	15
Thinnest positive cylinder (1 mm height)	0.5
Thinnest positive cylinder (3 mm height)	1
Thinnest positive cylinder (5 mm height)	1
Thinnest positive wall (5 mm height)	0.5
Thinnest positive wall (10 mm height) (mm)	0.5
Smallest successful Z through hole (mm)	2

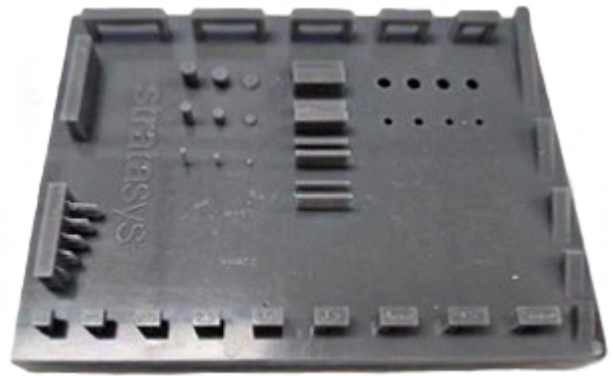

Thermal Properties


Mechanical Properties After Aging in 150 °C After 500 & 1,000 hours

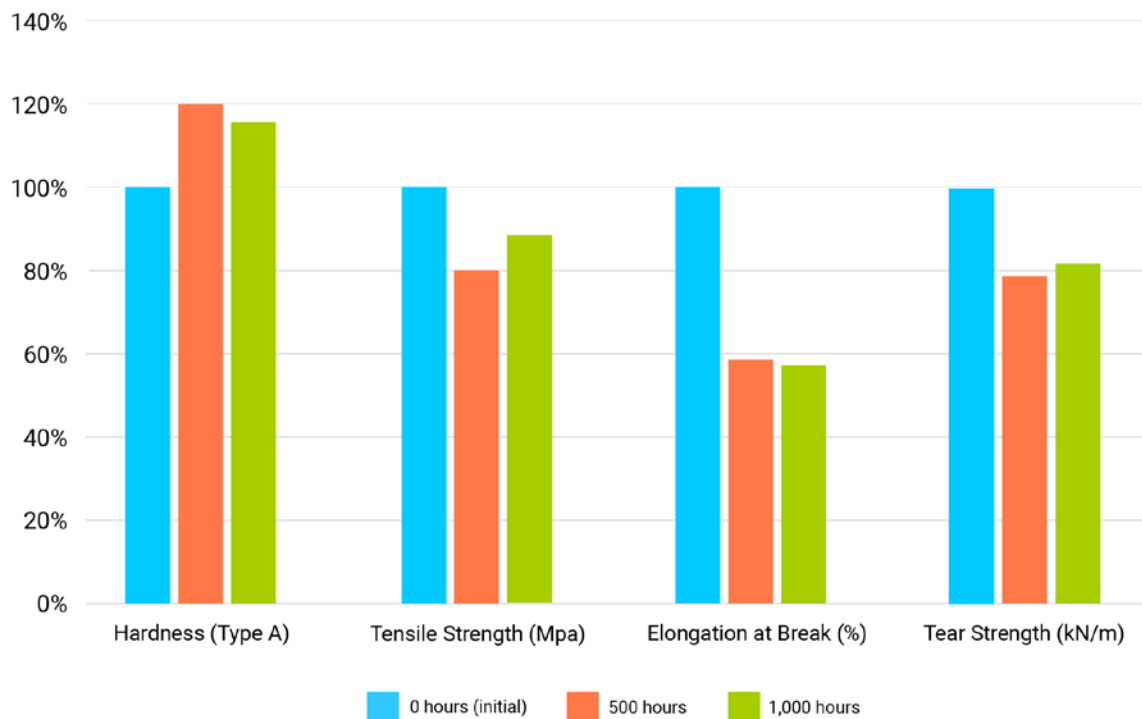



Dynamic Mechanical Analysis

The below graph shows how the mechanical properties of the material change with temperature at a frequency of 1.0 Hz. It tracks the storage modulus (E'), loss modulus (E''), and damping factor ($\tan\delta$), indicating the material's stiffness, energy dissipation, and damping behavior, respectively. The data demonstrate that the material maintains relatively stable mechanical performance across a wide temperature range, with gradual softening and reduced damping as temperature increases.

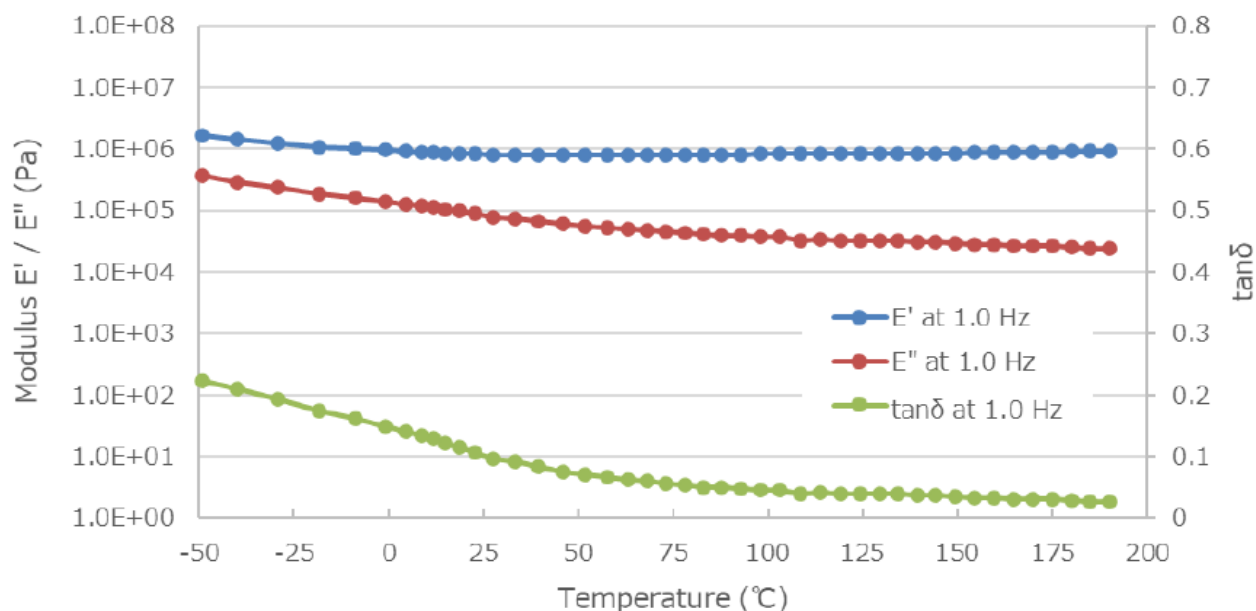

Temperature	-49	-29	-1	28	52	73	98	124	149	175	190
Modulus E' @ 1.0 Hz (MPa)	1.66	1.20	0.95	0.81	0.79	0.79	0.81	0.83	0.85	0.89	0.93
Modulus E'' @ 1.0 Hz (MPa)	0.37	0.23	0.14	0.08	0.05	0.04	0.03	0.03	0.03	0.03	0.02
Tan delta @ 10 Hz	0.22	0.19	0.15	0.10	0.07	0.06	0.05	0.04	0.03	0.03	0.03



alphacam GmbH
Erlenwiesen 16
D-73614 Schorndorf
Tel.: +49 7181 9222-0
info@alphacam.de

alphacam austria GmbH
Handelskai 92, Gate1 / 2. OG / Top A
A-1200 Wien
Tel.: +43 1 3619 600-0
info@alphacam.at

alphacam swiss GmbH
Zürcherstrasse 14
CH-8400 Winterthur
Tel.: +41 52 26207-50
info@alphacam.ch



alphacam.de

.at

.ch

stratasys.com

ISO 9001:2015

Certified

MATERIAL DATA SHEET
P3™ DLP



© 2026 Stratasys. All rights reserved. Stratasys, the Stratasys Signet logo, Origin, and P3 are registered trademarks of Stratasys Inc. All other trademarks are the property of their respective owners, and Stratasys assumes no responsibility with regard to the selection, performance, or use of these non-Stratasys products. Product specifications are subject to change without notice.
MDS_P3_Silicone 25A_0726a